



Druck-Setzungs-Versuch

U 5 Ost E

Bearbeiter: Ti

Datum: 29.10.18

Auftragsnummer: 022445

Entnahmestelle: B 70-3/17


Tiefe [m]: 6,75

Labornummer: 23

Geolog. Bez.: Torf



Normalspannung [kN/m²] (logarithmisch)

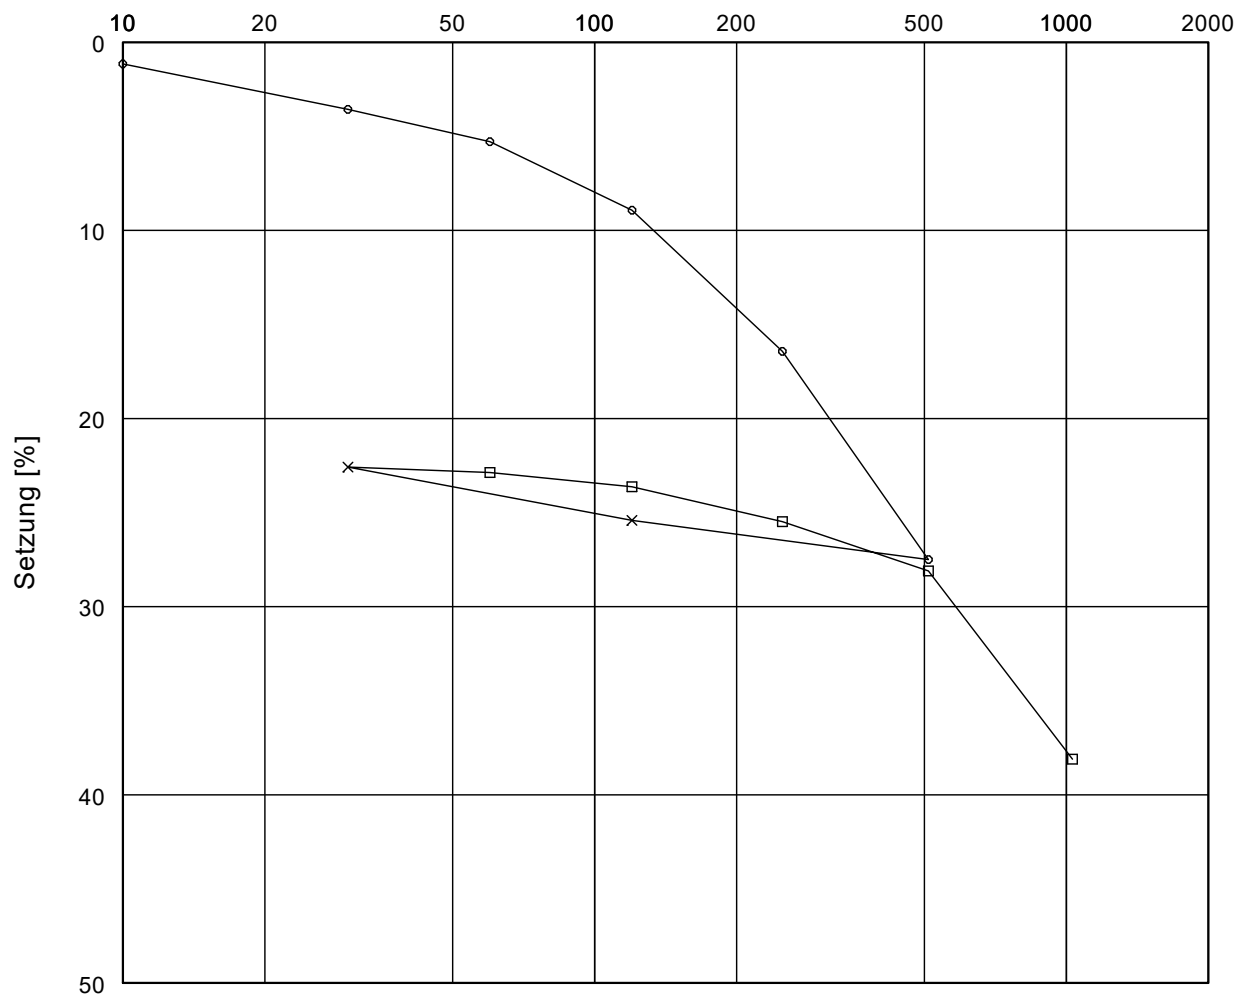

Versuch-Nr.	1	2	3	4	5	6	7	8	9	10	11	12	13
Normalspannung [kN/m ²]	10.0	30.0	60.0	120.0	250.0	510.0	120.0	30.0	60.0	120.0	250.0	510.0	1030.0
Meßuhrablesung [mm]	0.161	0.500	0.740	1.250	2.300	3.850	3.558	3.161	3.202	3.308	3.568	3.934	5.335
Steifemodul [MN/m ²]		0.83	1.8	1.6	1.7	2.3	-	-	10.2	7.9	7.0	9.9	5.2

Einbauhöhe [mm] = 14.000	w (vorher) [%] = 100,2
Probendurchmesser [mm] = 70	w (nachher) [%] = 73,7