



Druck-Setzungs-Versuch

U 5 Ost E

Bearbeiter: Ti

Datum: 29.10.18


Auftragsnummer: 022445

Entnahmestelle: B 70-4/17


Tiefe [m]: 7,25

Labornummer: 26

Geolog. Bez.: Torf



Normalspannung [kN/m²] (logarithmisch)

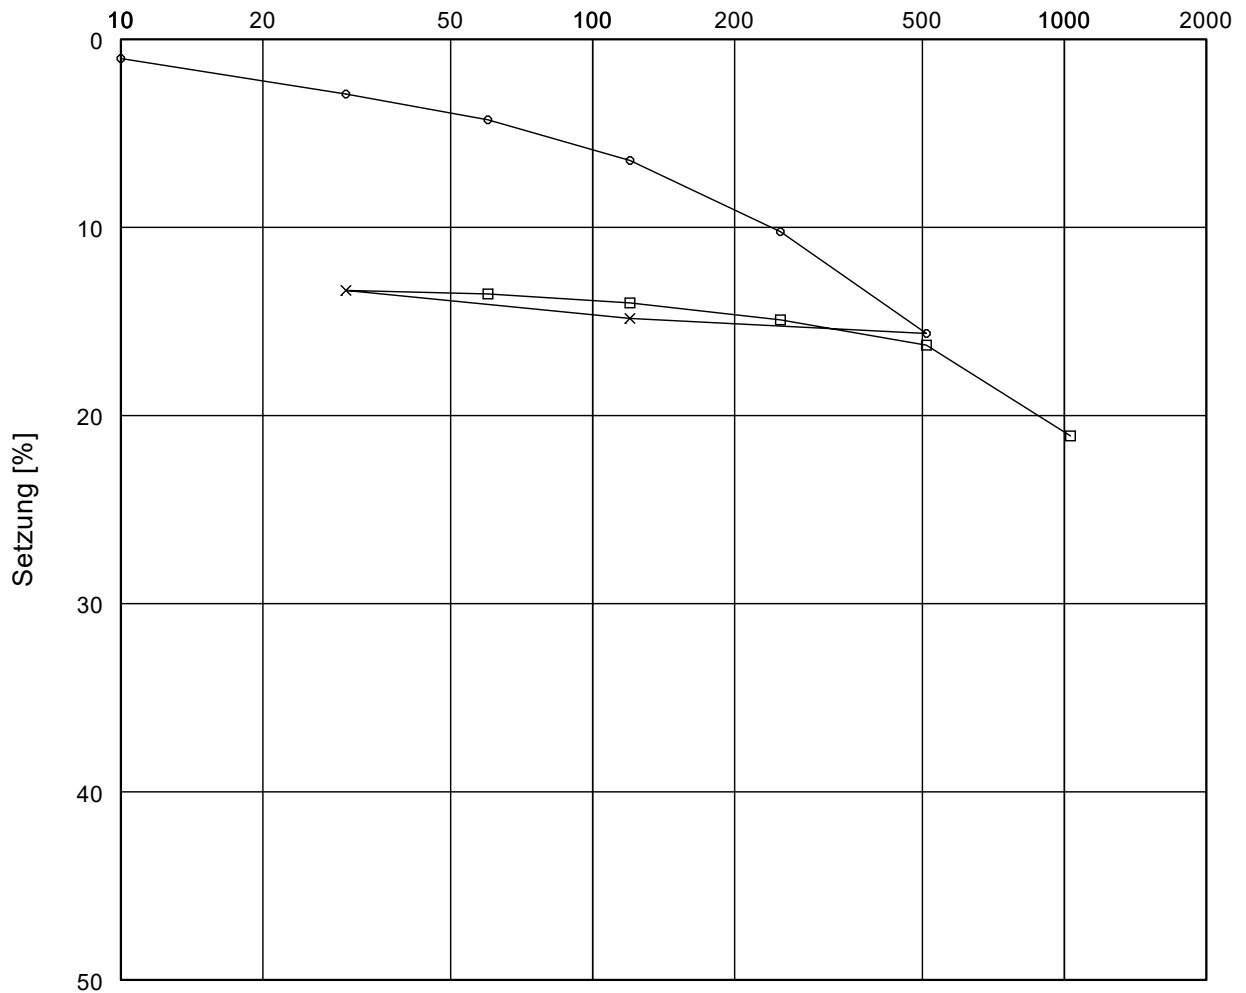

Versuch-Nr.	1	2	3	4	5	6	7	8	9	10	11	12	13
Normalspannung [kN/m ²]	10.0	30.0	60.0	120.0	250.0	510.0	120.0	30.0	60.0	120.0	250.0	510.0	1030.0
Meßuhrablesung [mm]	0.144	0.408	0.600	0.902	1.432	2.190	2.078	1.869	1.895	1.962	2.088	2.276	2.952
Steifemodul [MN/m ²]		1.06	2.2	2.8	3.4	4.8	-	-	16.2	12.5	14.4	19.4	10.8

Einbauhöhe [mm] = 14.000	w (vorher) [%] = 44,9
Probendurchmesser [mm] = 70	w (nachher) [%] = 34,1