



Druck-Setzungs-Versuch

U5 Ost E

Bearbeiter: Ti

Datum: 10.02.17


Auftragsnummer: 021785

Entnahmestelle: B 50

Tiefe: 33,25

Labornummer: 19

Geolog. Bez.: Lauenburger Ton, fS-Bänder

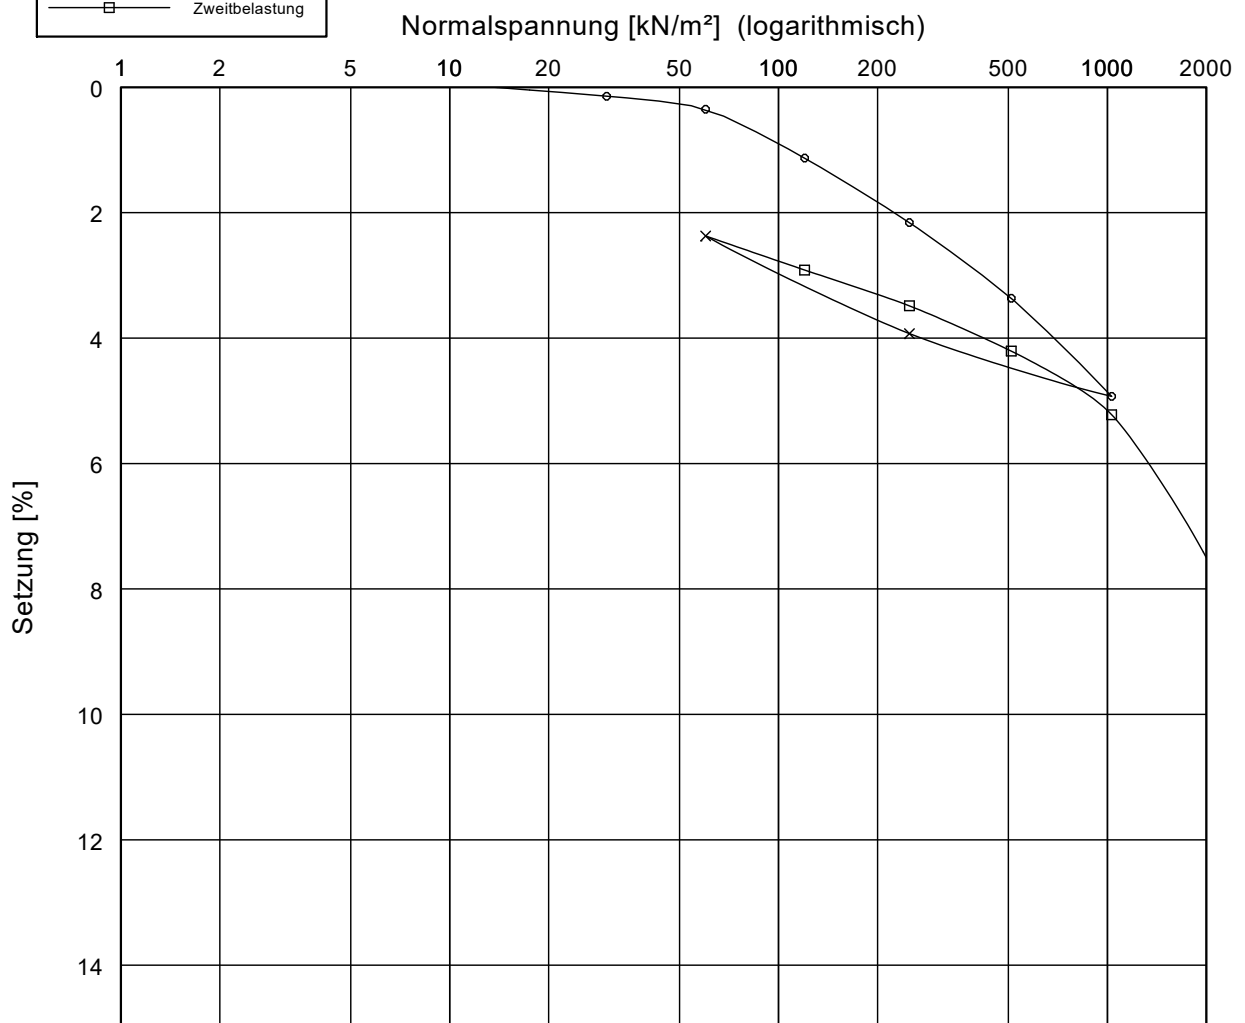

Versuch-Nr.	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Normalspannung [kN/m ²]	0.0	30.0	60.0	120.0	250.0	510.0	1030.0	250.0	60.0	120.0	250.0	510.0	1030.0	2030.0
Meßuhrablesung [mm]	0.000	0.020	0.049	0.158	0.302	0.471	0.690	0.550	0.332	0.408	0.488	0.589	0.731	1.060
Steifemodul [MN/m ²]		21.0	14.5	7.7	12.6	21.5	33.2	-	-	11.1	22.7	36.0	51.3	42.6

Einbauhöhe [mm] = 14.000	w (vorher) [%] = 27,2
Probendurchmesser [mm] = 70	w (nachher) [%] = 26,6